

2025 SA SENIORS CLASSIC



Oil Pattern Distance **Forward Oil Total Tank Configuration**

41 16.5 mL Multi Tank

Reverse Brush Drop Reverse Oil Total Tank A Conditioner

32 11.55 mL **Prodigy** Oil Per Board **Volume Oil Total** Tank B Conditioner


50 ul 28.05 mL **Prodigy**

2 8L 8R 3 10 A 75 1.4 5.6 4.2 3750 3 9L 9R 2 10 A 46 5.6 8.4 2.8 2300 4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	2 8L 8R 3 10 A 75 1.4 5.6 4.2 3750 3 9L 9R 2 10 A 46 5.6 8.4 2.8 2300 4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0	21			SPEED	TANK	CROSSED	START	END	FEET	T.OIL
3 9L 9R 2 10 A 46 5.6 8.4 2.8 2300 4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	3 9L 9R 2 10 A 46 5.6 8.4 2.8 2300 4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0		2R	2	10	Α	74	0.0	1.4	1.4	3700
4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	4 10L 10R 2 14 A 42 8.4 12.3 3.9 2100 5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	8L	8R	3	10	Α	75	1.4	5.6	4.2	3750
5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	5 10L 10R 1 18 A 21 12.3 14.8 2.5 1050 6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	9L	9R	2	10	Α	46	5.6	8.4	2.8	2300
6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	6 11L 11R 2 22 A 38 14.8 21.0 6.2 1900 7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	10L	10R	2	14	Α	42	8.4	12.3	3.9	2100
7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0	7 12L 12R 2 22 A 34 21.0 27.2 6.2 1700 8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	10L	10R	1	18	Α	21	12.3	14.8	2.5	1050
8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	8 2L 2R 0 22 A 0 27.2 34.0 6.8 0 9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	11L	11R	2	22	Α	38	14.8	21.0	6.2	1900
9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	9 2L 2R 0 26 A 0 34.0 38.0 4.0 0	12L	12R	2	22	Α	34	21.0	27.2	6.2	1700
		2L	2R	0	22	Α	0	27.2	34.0	6.8	0
40 21 20 0 20 4 0 20 44 0 20 4	10 2L 2R 0 30 A 0 38.0 41.0 3.0 0	2L	2R	0	26	Α	0	34.0	38.0	4.0	0
10 2L 2K 0 30 A 0 38.0 41.0 3.0 (2L	2R	0	30	Α	0	38.0	41.0	3.0	0
10			10L 10L 11L 12L 2L 2L	10L 10R 10L 10R 11L 11R 12L 12R 2L 2R 2L 2R	10L 10R 2 10L 10R 1 11L 11R 2 12L 12R 2 2L 2R 0 2L 2R 0	10L 10R 2 14 10L 10R 1 18 11L 11R 2 22 12L 12R 2 22 2L 2R 0 22 2L 2R 0 26	10L 10R 2 14 A 10L 10R 1 18 A 11L 11R 2 22 A 12L 12R 2 22 A 2L 2R 0 22 A 2L 2R 0 26 A	10L 10R 2 14 A 42 10L 10R 1 18 A 21 11L 11R 2 22 A 38 12L 12R 2 22 A 34 2L 2R 0 22 A 0 2L 2R 0 26 A 0	10L 10R 2 14 A 42 8.4 10L 10R 1 18 A 21 12.3 11L 11R 2 22 A 38 14.8 12L 12R 2 22 A 34 21.0 2L 2R 0 22 A 0 27.2 2L 2R 0 26 A 0 34.0	10L 10R 2 14 A 42 8.4 12.3 10L 10R 1 18 A 21 12.3 14.8 11L 11R 2 22 A 38 14.8 21.0 12L 12R 2 22 A 34 21.0 27.2 2L 2R 0 22 A 0 27.2 34.0 2L 2R 0 26 A 0 34.0 38.0	10L 10R 2 14 A 42 8.4 12.3 3.9 10L 10R 1 18 A 21 12.3 14.8 2.5 11L 11R 2 22 A 38 14.8 21.0 6.2 12L 12R 2 22 A 34 21.0 27.2 6.2 2L 2R 0 22 A 0 27.2 34.0 6.8 2L 2R 0 26 A 0 34.0 38.0 4.0

		START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
	1	2L	2R	0	30	В	0	41.0	30.0	-11.0	0
	2	14L	12R	1	26	В	15	30.0	26.4	-3.6	750
	3	13L	11R	1	26	В	17	26.4	22.8	-3.6	850
	4	11L	9R	2	22	В	42	22.8	16.6	-6.2	2100
	5	10L	8R	2	18	В	46	16.6	11.5	-5.1	2300
	6	2L	2R	3	14	В	111	11.5	5.6	-5.9	5550
	7	2L	2R	0	14	В	0	5.6	5.0	-0.6	0
	8	2L	2R	0	10	В	0	5.0	0.0	-5.0	0
ı											

Cleaner Ratio Main Mix Forward 24:1 Cleaner Ratio Back End Mix 24:1 Reverse Cleaner Ratio Back End Distance 59 Combined

1.01

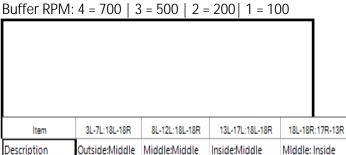


1.58

4.6

Track Zone Ratio

18L-18R-7R-3R Middle:Outside 4.6					t	t				t									t			55	,
18L-18R:7R-3R //iddle:Outside					+											1		<u> </u>				25	
18L-18R:7R-3R //iddle:Outside																						<u>ح</u>	
0VED 9 08 57 07 51 01 5																							,
0VED 9 08 57 07 51 01 5		L	H	H	1	ļ	H	1	H	ļ	1	ļ	Н	1	H	1	H	1	1	Н	H	8	
0VED																							
18L-18R:7R-3R //iddle:Outside														I				Ī	Ī			35	
\$2 07 \$1 01 \$ 18L-18R:7R-3R //iddle:Outside			Ц	Ц	1	ļ	Ц	1	l									1	1	Ц	Ц	, ,	
18L-18R:7R-3R //iddle:Outside																							
18L-18R:7R-3R //iddle:Outside						İ													İ			25	
18L-18R:7R-3R // Middle:Outside						l																70	1
18L-18R:7R-3R // Middle:Outside																						15	!
18L-18R:7R-3R // Middle:Outside																							
/liddle:Outside																						10	;
	18L-18R:7R-3R																					2	
4.6	Middle:Outside																						
	4.6				I																		_

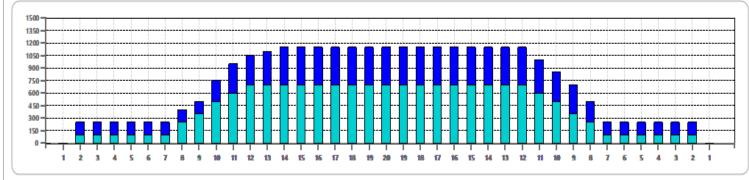

18L-18R:12R-8R

1.37

Middle:Middle

Middle:Outsid